

FUJIFILM

expect INNOVATION™

EXCEED SERIES



XS20sx6.3BRM

Technology That Inspires...

FUJINON

For design help, accessories or pricing, please contact:
sales@avsupply or call: 1-858-565-1101

AUDIOVIDEO SUPPLY

1-800-284-2288 sales@avsupply.com
www.avsupply.com

Distributed By: Audio Video Supply -- Tel: 1-800-284-2288 -- www.avsupply.com


XS20sx6.3BRM




Zoom Ratio / Format	20X / 1/2"
Focal Length	6.3 to 126 mm
Maximum Relative Aperture	1:1.4 (6.3 ~ 88 mm)
Maximum Photometric Aperture T-No.	1:2.0 (126 mm)
Angular Field of View	1:4.8 (175 mm)
16:9 Aspect Ratio	6.3 mm 57° 54' x 34° 34' 126 mm 3° 10' x 1° 47'
M.O.D. from Image Plane	1.11m
M.O.D. from Front of Lens	0.9m
Object Dimensions at M.O.D.	6.3 mm 904 x 508 mm 126 mm 47 x 26 mm
Filter Size	ø 82mm P=1 (On Barrel)
Dia ø x Length (w/o Hood)	ø85 x 180.8 mm
Weight (w/o Hood)	1.4 kg (RM)
Options	Ratio Converter / 16 Bit Encoder
Features	Inner Focus / Quick Zoom

ACCESSORIES: HD & SD ENG/EFP PROFESSIONAL REAR CONTROL KITS

MS-01 Manual Focus/Servo Zoom





MM-01 Manual Focus/Manual Zoom Not available on S16x7.3



*Specify camera type.

SS-01 Servo Focus/Servo Zoom Not available on S16x7.3

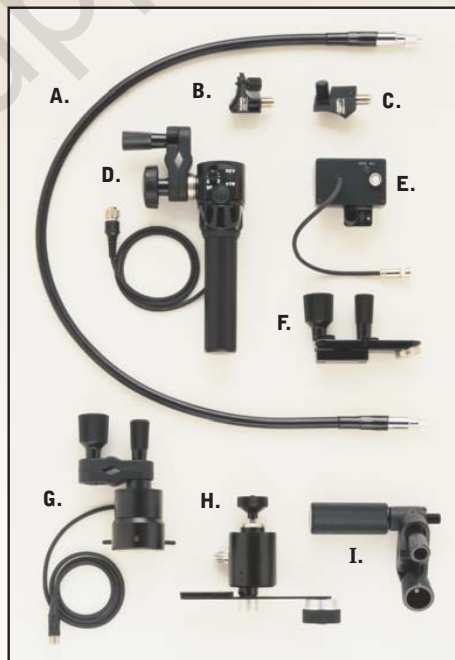

*FMM-8 for use with S16x7.3

For Sales Contact Information go to
www.Fujinon.com

For design help, accessories or pricing, please contact:
sales@avsupply or call: 1-858-565-1101